

# 10GSH GLOBAL STANDARD HIGH HEAD



Global Pump® Standard High Head pumps are specifically designed to effectively handle a wide-range of liquids in applications such as liquid transfer, wash down, fire protection, fracking and jetting where high heads and pressure are required.

Global Pump Standard High Head pumps provide a dependable, highly efficient solution. The model 10GSH is capable of achieving maximum flows of 4,750 gpm (1,080 m³/h) and maximum total head of 340' (104 m), with solids handling up to 1.5" (38.1 mm) in diameter.

The standard 10GSH is powered by a water-cooled, 6-cylinder diesel engine. Alternative drives are available, including other diesel engines or electric motor options.

## FEATURES

Global Pump's rugged, heavy duty pumps are engineered specifically for portable application

Non-return valve uses only a single moving part to allow full flow with minimal restriction

Standard engine control panel provides preset emergency shutdown protection and allows the addition of automatic level control

Fully guarded coupling

Pump casings are hydrostatically tested to 50 psig (345 kPa) above the peak casing design pressure

Skid-mounted formats with tie downs, lifting bail, and fork pockets

## OPTIONS

Available with a variety of priming systems, including Global's Auto Prime® automatic priming system (compressor-fed venturi priming) or a diaphragm priming system

Mechanical seal with glycol (biodegradable optional) quench allows the pump to start and run dry


Global Pump's Environmental Box separates and silences air exhaust and returns liquid to the pump suction.

Fuel cubes for extended run times and/or remote location as required

Sound attenuated enclosure options

Hose racks, accessory containers and other custom features available as required


Wide range of suction and discharge fittings including Global Pump's own "QD" Quick Disconnect fittings and accessories

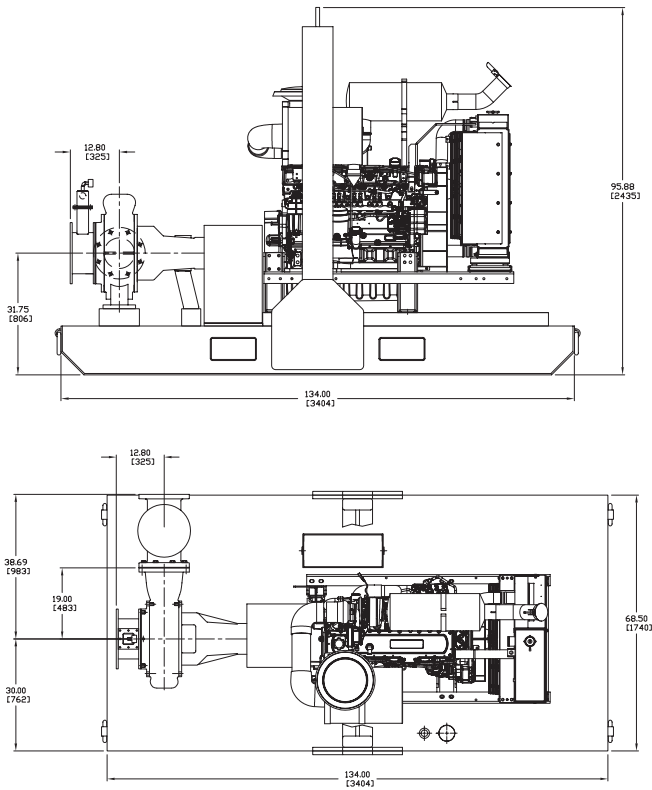**SPECIFICATIONS**

Connections	10" x 8" (250 mm x 200 mm) ANSI Flanges
Max Pump Speed	2,000 rpm
Max Flow	4,750 gpm (1,080 m <sup>3</sup> /h)
Max Head	340' (104 m)
Max Static Priming Lift	28' (8.5 m)
Temperature Limit	160° F (70° C)
Solids Handling Capability	1.5" (38.1 mm)
Max Casing Pressure	200 psig (1,379 kPa)
Fuel Cell	150 gallons (565 liters)
Dry Weight	? lbs

**PUMP MATERIAL**

Casing	Cast Steel (CD4MCu is an option)
Impeller	CD4MCu
Bearing Housing	Cast Iron
Bearing Lubrication	Grease
Shaft	Stainless Steel
Seal	Silicon Carbide on Silicon Carbide
Chassis/Fuel Cell	Steel
Non-Return Valve	Nitrile Fitted Cast Iron

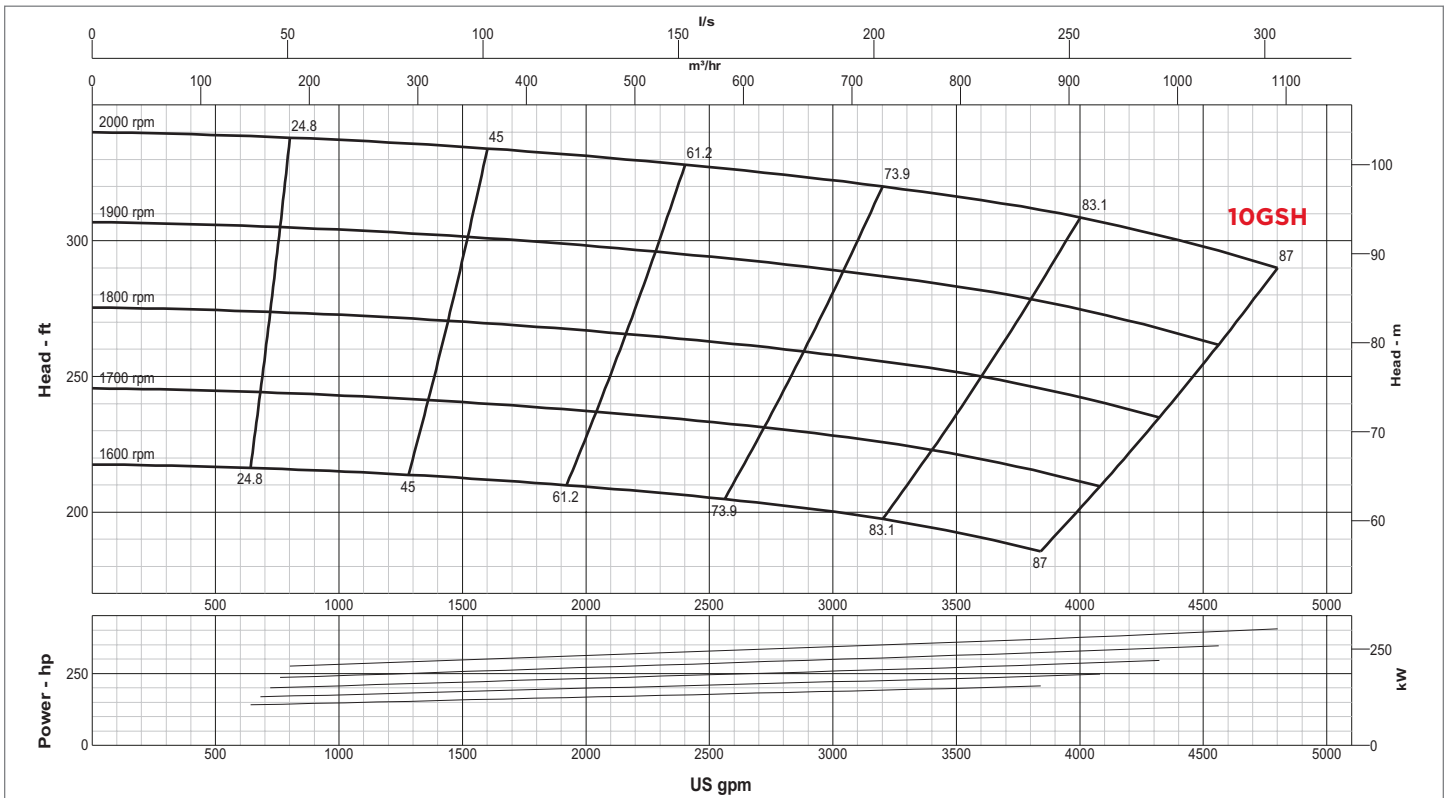

**LWENDO INDUSTRIES**  
**10 SILWERBOOM STREET, MAYBERRY PARK ALRODE, 1448**

**C: +27 (0) 72 274 6900 T: +27 (0) 11 568 5048**

**E: [info@lwendo.co.za](mailto:info@lwendo.co.za) [www.lwendoindustries.co.za](http://www.lwendoindustries.co.za)**